

IP44 | CRI 80+ | 220–240V | SELV



A compact recessed LED downlight for fixed interior installations, delivering uniform, comfortable downward illumination, with a powder-coated finish.

KEY FEATURES


SMD LED downlight

The SMD LED downlight built around Bridgelux - BMTc LEDs, delivering 80+ colour rendering for accurate, true-to-tone light, with a 110° beam for broad, even illumination, housed in a die-cast aluminum body with a powder-coated finish for effective heat management and a long service life. Rated IP44 for splash-prone areas such as bathrooms and kitchens, dimmable via On/Off / Phase-cut / 0–10V / DALI, powered by a Lifud driver.


TECHNICAL SPECIFICATIONS

Light Source	SMD LED
Power	8W / 15W / 20W / 30W / 40W
3CCT	3000K / 4000K / 6000K
CRI	80+
Beam Angle	110°
Chip Brand	Bridgelux - BMTc
Input Voltage	220–240V AC
Driver Options	Lifud
Material	Die-cast aluminum
Finish	White / Black
Paint / Coating	Powder-coated
IP Rating	IP44
Dimming	On/Off / Phase-cut / 0–10V / DALI


CCT OPTIONS

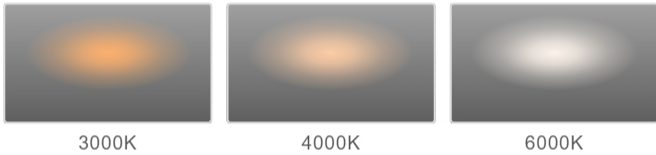

BEAM ANGLE OPTIONS

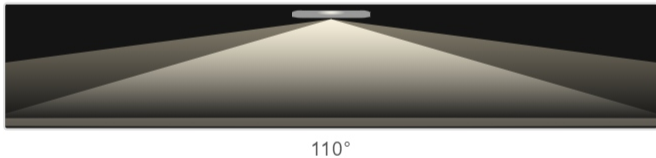

DIMMING OPTIONS

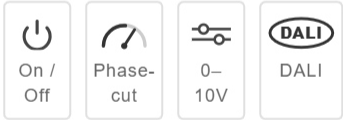

APPLICATIONS

- Retail
- Hospitality
- Residential
- Offices
- Corridors

AVAILABLE VERSIONS

Code	Power	Luminous flux	Cut-out	Size
DL-RY-HANSO-8W-CCT	8W	560 LM	Ø70 mm	Φ85 × 36 mm
DL-RY-HANSO-15W-CCT	15W	1200 LM	Ø100 mm	Φ110 × 36 mm
DL-RY-HANSO-20W-CCT	20W	1800 LM	Ø125 mm	Φ140 × 38 mm
DL-RY-HANSO-30W-CCT	30W	2700 LM	Ø150 mm	Φ155 × 38 mm
DL-RY-HANSO-40W-CCT	40W	3600 LM	Ø200 mm	Φ215 × 41 mm

