

Circular Bulkhead

Outdoor

RAYTECK®

OUTDOOR

IP65



A precision-engineered LED outdoor delivering reliable, high-quality illumination.

KEY FEATURES

SMD LED outdoor


The SMD LED outdoor delivers 80+ colour rendering for accurate, true-to-tone light, with a 120° beam for broad, even illumination, housed in a polycarbonate body for effective heat management and a long service life. Rated IP65 for wet and fully outdoor locations.




TECHNICAL SPECIFICATIONS

Light Source	SMD LED
Power	24W
3CCT	6500K
CRI	80+
Beam Angle	120°
Input Voltage	220–240V AC
Material	Polycarbonate
Finish	White
IP Rating	IP65
Dimming	On/Off

CCT OPTIONS

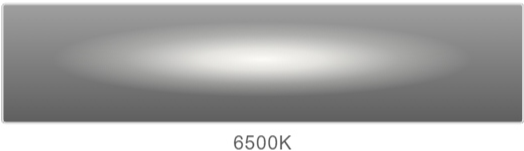

BEAM ANGLE OPTIONS

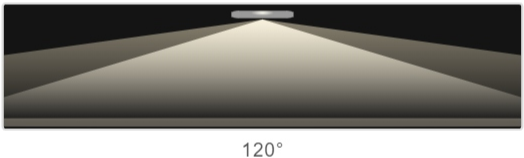


DIMMING OPTIONS



AVAILABLE VERSIONS

Code	Power	Luminous flux	Size
OD-RY-BulkHead1-24W-WH-6K	24W	85LM/W	280x62mm mm

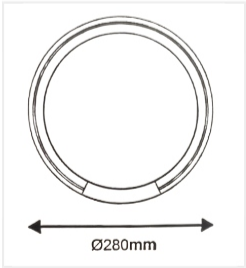

Photometric reference: Photometric data measured at 4000K / CRI 80, Ta 25°C, nominal mains. Luminous flux tolerance $\pm 10\%$. Lumen output and efficacy vary with correlated colour temperature (CCT) — warmer tones (2700–3000K) are typically lower and cooler tones (5000–6500K) higher — and reduce as CRI increases (90+ CRI is $\sim 10\text{--}15\%$ below 80 CRI). Full IES / LDT photometric files, LM-79 / LM-80 test reports and DIALux data are available on request.

Specifications are subject to change without prior notice