

TWILIGHT S

OUTDOOR UP&DOWN WALL

Outdoor

RAYTECK®

IP54



RoHS



A precision-engineered LED outdoor delivering reliable, high-quality illumination.

KEY FEATURES


GU10 outdoor

The GU10 outdoor delivers - colour rendering for accurate, true-to-tone light, with a - beam for controlled light distribution, housed in a die-cast aluminum body with a powder-coated finish for effective heat management and a long service life. Rated IP54 for damp and dust-exposed areas, dimmable via On/Off / Phase-cut.

TECHNICAL SPECIFICATIONS

Light Source	GU10
Power	GU10 x 2
3CCT	2700K / 3000K / 4000K / 6500K
CRI	-
Beam Angle	-
Input Voltage	220–240V AC
Material	Die-cast aluminum
Finish	White / Black / Grey
Paint / Coating	Powder-coated
IP Rating	IP54
Dimming	On/Off / Phase-cut

CCT OPTIONS

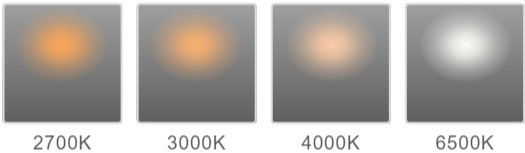


DIMMING OPTIONS



AVAILABLE VERSIONS

Code	Power	Size
OD-RY-TWILIGHT-SQ	GU10	155x75x65 mm



Photometric reference: Photometric data measured at 4000K / CRI 80, Ta 25°C, nominal mains. Luminous flux tolerance $\pm 10\%$. Lumen output and efficacy vary with correlated colour temperature (CCT) — warmer tones (2700–3000K) are typically lower and cooler tones (5000–6500K) higher — and reduce as CRI increases (90+ CRI is ~10–15% below 80 CRI). Full IES / LDT photometric files, LM-79 / LM-80 test reports and DIALux data are available on request.

Specifications are subject to change without prior notice