

Waterproof Tri-Proof Tube



PARKING LIGHT

IP66 | 2 Side Connection | T8 Lamp




Rayteck: Waterproof trip-proof tube light 40W double T8 tube holder with lamp, STAINLESS STEEL CLIPS




TECHNICAL SPECIFICATIONS

Light Source	T8 Lamp
Power	T8 Lamp x 2
CCT	3000K / 4000K / 6000K
Mounting	Surface Mounted
Beam Angle	110
Input Voltage	220–240V AC
Body Material	Polycarbonate
Diffuser Material	Clear
Finish	Gray
IP Rating	IP66
Dimming	Non Dimmable
Clips	Stainless Steel
Warranty	5 years For Fitting


CCT OPTIONS

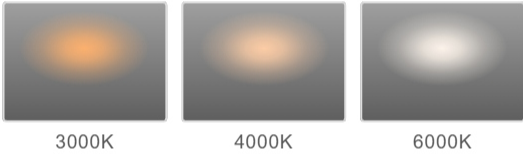

BEAM ANGLE OPTIONS

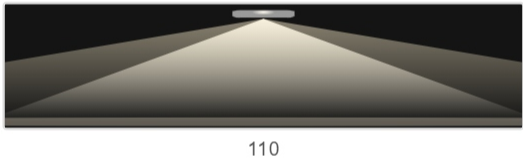

DIMMING OPTIONS



AVAILABLE VERSIONS

Code	Power	Size
RY-TPL01-4FT-IP66	40W	L1250 × W100 mm
RY-TPL01-2FT-IP66	20W	L690 × W100 mm



ACCESSORIES



Clips

Photometric reference: Photometric data measured at 3000K / CRI 80, Ta 25°C, nominal mains. Luminous flux tolerance $\pm 10\%$. Lumen output and efficacy vary with correlated colour temperature (CCT) — warmer tones (2700–3000K) are typically lower and cooler tones (5000–6500K) higher — and reduce as CRI increases (90+ CRI is $\sim 10\text{--}15\%$ below 80 CRI). Full IES / LDT photometric files, LM-79 / LM-80 test reports and DIALux data are available on request.

Specifications are subject to change without prior notice