


AURA D

TRIMLESS SPOTLIGHT

Spotlight

RAYTECK®

COB | SELV

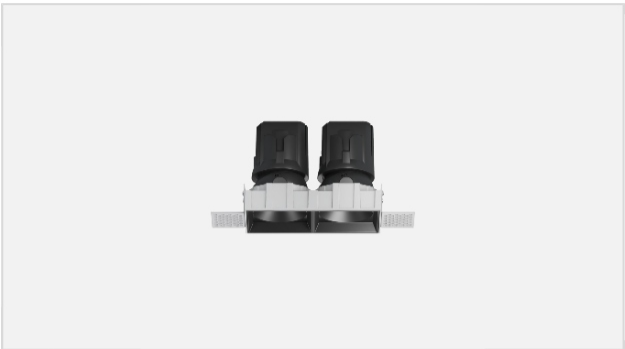

RoHS

A precision-engineered LED spotlight delivering reliable, high-quality illumination with exceptional colour accuracy.

KEY FEATURES

COB LED spotlight

The COB LED spotlight built around OSRAM LEDs, delivering 90+ colour rendering for accurate, true-to-tone light, with a 15° / 24° / 36° / 60° beam for focused, directional accenting, housed in a die-cast aluminum body with a powder-coated finish for effective heat management and a long service life. Rated IP54 for damp and dust-exposed areas, dimmable via On/Off / Phase-cut / 0–10V / DALI-2, powered by a OSRAM driver.


TECHNICAL SPECIFICATIONS

Light Source	COB LED
Power	24W
CCT	3000K / 4000K
CRI	90+
Beam Angle	15° / 24° / 36° / 60°
SDCM	<3
Chip Brand	OSRAM
Input Voltage	220–240V
Driver Options	OSRAM
Material	Die-cast aluminum
Finish	White Trim / Black Reflector
Paint / Coating	Powder-coated
IP Rating	IP54
Dimming	On/Off / Phase-cut / 0–10V / DALI-2
Warranty	5 years

CCT OPTIONS



3000K



4000K

BEAM ANGLE OPTIONS



15°



24°



36°



60°

DIMMING OPTIONS



On / Off



Phase-cut




0–10V



DALI-2

AVAILABLE VERSIONS

Code	Power	Luminous flux	Cut-out	Size
SP-RY-AURAD12X2-24W-3K24D	24W	105 LM/W	145×78	217×74×111 mm



SP-RY-AURAD12X2-24W-3K24D

Photometric reference: Photometric data measured at 3000K / CRI 80, Ta 25°C, nominal mains. Luminous flux tolerance $\pm 10\%$. Lumen output and efficacy vary with correlated colour temperature (CCT) — warmer tones (2700–3000K) are typically lower and cooler tones (5000–6500K) higher — and reduce as CRI increases (90+ CRI is ~10–15% below 80 CRI). Full IES / LDT photometric files, LM-79 / LM-80 test reports and DIALux data are available on request.

Specifications are subject to change without prior notice