

DOME 2

LED SPOTLIGHT

COB | IP20



A fixed directional LED spotlight for accent and feature lighting, delivering crisp, focused beams with exceptional colour accuracy, with a powder-coated finish.

KEY FEATURES


COB LED spotlight

The COB LED spotlight built around OSRAM LEDs, delivering 90+ colour rendering for accurate, true-to-tone light, with a 15° / 24° / 36° / 55° beam for focused, directional accenting, housed in a die-cast aluminum body with a powder-coated finish for effective heat management and a long service life. Dimmable via On/Off / Phase-cut / 0-10V / DALI-2, powered by a Lifud / Tridonic driver.


TECHNICAL SPECIFICATIONS

Light Source	COB LED
Power	10W
CCT	2700K / 3000K / 4000K / 6500K
CRI	90+
Beam Angle	15° / 24° / 36° / 55°
Chip Brand	OSRAM
Input Voltage	220-240V AC
Driver Options	Lifud / Tridonic
Material	Die-cast aluminum
Finish	White / Black
Paint / Coating	Powder-coated
Beam Tilt	0°
Dimming	On/Off / Phase-cut / 0-10V / DALI-2


CCT OPTIONS

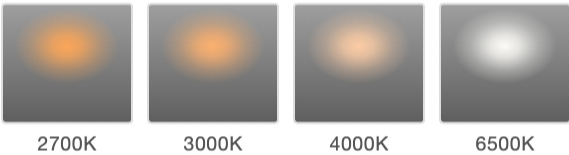

BEAM ANGLE OPTIONS

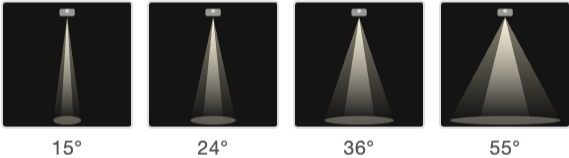

DIMMING OPTIONS



APPLICATIONS

- ⦿ Accent lighting
- 🗑 Retail
- 🖼 Galleries
- 👤 Hospitality

AVAILABLE VERSIONS

Code	Power	Luminous flux	Cut-out	Size
SP-RY-DOME2-10W-3K	10W	105 LM/W	Ø75 mm	Ø82 x 40 mm

