

COB | IP20 | CRI 90+



A directional LED spotlight for accent and feature lighting, delivering crisp, focused beams.

KEY FEATURES


LED spotlight
The LED spotlight built around CREE LEDs, with a 15° / 24° / 36° / 55° beam for focused, directional accenting, housed in a die-cast aluminum body for effective heat management and a long service life. Rated IP20 for clean indoor spaces, dimmable via On/Off / Phase-cut / 0–10V / DALI, powered by a EagleRise driver.




TECHNICAL SPECIFICATIONS

Power	12W / 18W
CCT	2700K / 3000K / 4000K / 6500K
Beam Angle	15° / 24° / 36° / 55°
Chip Brand	CREE
IP Rating	IP20
Luminous Flux	105 LM/W
Input Voltage	220–240V AC
Driver Options	EagleRise
Material	Die-cast aluminum
Finish	White Body
Dimming	On/Off / Phase-cut / 0–10V / DALI
Warranty	5 years


CCT OPTIONS

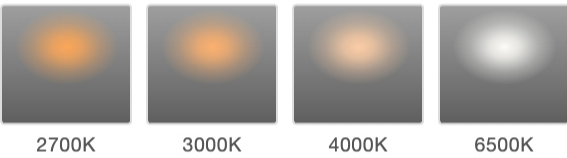

BEAM ANGLE OPTIONS

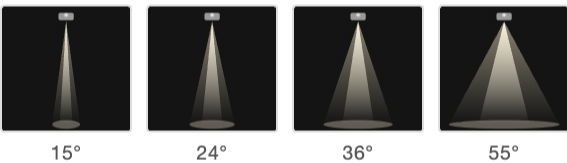

DIMMING OPTIONS





APPLICATIONS

- ⦿ Accent lighting
- 🛒 Retail
- 🖼️ Galleries
- 🍽️ Hospitality

AVAILABLE VERSIONS

Code	Power	Luminous flux	Finish	Size
SP-RY-MURA-12W-WH/BK-IP20	12W	1,260 lm	White Body	Ø75 x H116 mm
SP-RY-MURA-18W-WH/BK-IP20	18W	1,890 lm	White Body	Ø95 x H150 mm

ACCESSORIES

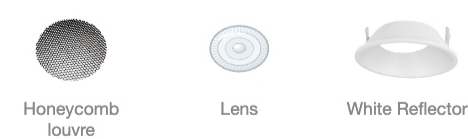

Photometric reference: Photometric data measured at 4000K / CRI 90+, Ta 25°C, nominal mains. Luminous flux tolerance ±10%. Lumen output and efficacy vary with correlated colour temperature (CCT) — warmer tones (2700–3000K) are typically lower and cooler tones (5000–6500K) higher — and reduce as CRI increases (90+ CRI is ~10–15% below 80 CRI). Full IES / LDT photometric files, LM-79 / LM-80 test reports and DIALux data are available on request.

Specifications are subject to change without prior notice