

MURA2

Surface Spotlight

RAYTECK®

SURFACE SPOTLIGHT

IP65



RoHS



UK
CA



A directional LED spotlight for accent and feature lighting, delivering crisp, focused beams with exceptional colour accuracy, with a powder-coated finish.

KEY FEATURES


COB LED spotlight

The COB LED spotlight built around CREE LEDs, delivering 90+ colour rendering for accurate, true-to-tone light, with a 15° / 24° / 36° / 55° beam for focused, directional accenting, housed in a die-cast aluminum body with a powder-coated finish for effective heat management and a long service life. Dimmable via On/Off / Phase-cut/10V / DALI, powered by a CREE driver.


TECHNICAL SPECIFICATIONS

Light Source	COB LED
Power	12W / 18W
CCT	2700K / 3000K / 4000K / 6500K
CRI	90+
Beam Angle	15° / 24° / 36° / 55°
Chip Brand	CREE
Input Voltage	220–240V AC
Driver Options	CREE
Material	Die-cast aluminum
Finish	White / Black
Paint / Coating	Powder-coated
Dimming	On/Off / Phase-cut / 0–10V / DALI


CCT OPTIONS

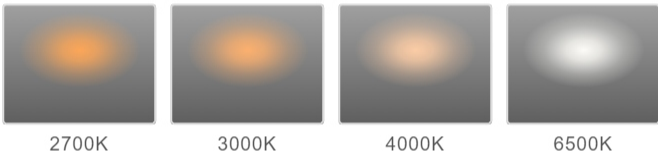

BEAM ANGLE OPTIONS

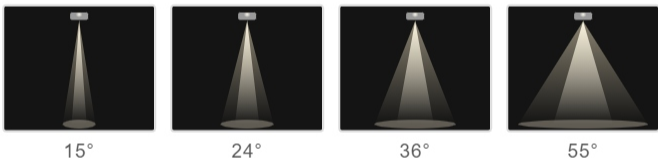

DIMMING OPTIONS




APPLICATIONS

- ⦿ Accent lighting
- 🏠 Retail
- 🖼️ Galleries
- 🍷 Hospitality

AVAILABLE VERSIONS

Code	Power	Luminous flux	Finish	Size
SP-RY-MURA2-12W-WH-IP65	12W	960 LM	White	83 × H88 mm
SP-RY-MURA2-12W-BK-IP65	12W	960 LM	Black	83 × H88 mm
SP-RY-MURA2-18W-WH-IP65	18W	1440 LM	White	105 × H105 mm
SP-RY-MURA2-18W-BK-IP65	18W	1440 LM	Black	105 × H105 mm
SP-RY-MURA2-24W-BK-IP65	24w	1920 LM	Black	Ø10 × H158 mm



ACCESSORIES



Honeycomb
louvre



Lens

Specifications are subject to change without prior notice