

MURA2

Surface Spotlight

RAYTECK®

SURFACE SPOTLIGHT

COB | IP65 | CRI 90+



RoHS



CB

A directional LED spotlight for accent and feature lighting, delivering crisp, focused beams.

KEY FEATURES


LED spotlight

The LED spotlight built around CREE LEDs, with a 15° / 24° / 36° / 55° beam for focused, directional accenting, housed in a die-cast aluminum body for effective heat management and a long service life. Rated IP65 for wet and fully outdoor locations, dimmable via On/Off / Phase-cut / 0–10V / DALI, powered by a EagleRise driver.


TECHNICAL SPECIFICATIONS

Power	12W / 18W / 24W
CCT	2700K / 3000K / 4000K / 6500K
Beam Angle	15° / 24° / 36° / 55°
Chip Brand	CREE
IP Rating	IP65
Input Voltage	220–240V AC
Driver Options	EagleRise
Material	Die-cast aluminum
Finish	White / Black
Dimming	On/Off / Phase-cut / 0–10V / DALI
Warranty	5 years


CCT OPTIONS

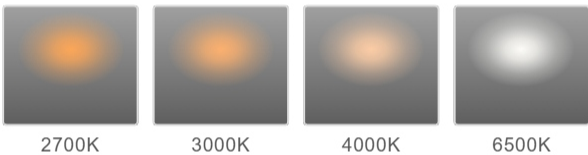

BEAM ANGLE OPTIONS

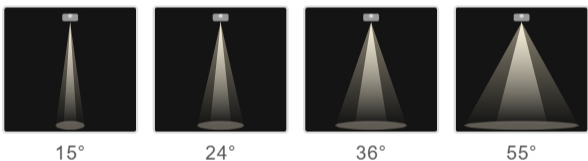

DIMMING OPTIONS




APPLICATIONS

- Accent lighting
- Retail
- Galleries
- Hospitality

AVAILABLE VERSIONS

Code	Power	Luminous flux	Finish	Size
SP-RY-MURA2-12W-IP65	12W	960 LM	Black	Ø83 × H88 mm
SP-RY-MURA2-18W-IP65	18W	1440 LM	Black	Ø105 × H105 mm
SP-RY-MURA2-24W-IP65	24w	1920 LM	Black	Ø10 × H158 mm



ACCESSORIES



Honeycomb
louvre



Lens

Photometric reference: Photometric data measured at 4000K / CRI 90+, Ta 25°C, nominal mains. Luminous flux tolerance $\pm 10\%$. Lumen output and efficacy vary with correlated colour temperature (CCT) — warmer tones (2700–3000K) are typically lower and cooler tones (5000–6500K) higher — and reduce as CRI increases (90+ CRI is $\sim 10\text{--}15\%$ below 80 CRI). Full IES / LDT photometric files, LM-79 / LM-80 test reports and DIALux data are available on request.

Specifications are subject to change without prior notice