

TRIMLESS SPOTLIGHT

IP20 | CRI 90+ | TRIMLESS | SELV



A directional LED spotlight for accent and feature lighting, delivering crisp, focused beams with exceptional colour accuracy.

KEY FEATURES


COB LED spotlight

The COB LED spotlight built around Osram LEDs, delivering 90+ colour rendering for accurate, true-to-tone light, with a 24° beam for focused, directional accenting, housed in a die-cast aluminum body for effective heat management and a long service life. Dimmable via On/Off / Phase-cut / 0–10V / DALI-2, powered by a Lifud driver.


TECHNICAL SPECIFICATIONS

Light Source	COB LED
Power	5W
CCT	2700K / 3000K / 4000K
CRI	90+
Beam Angle	24°
Luminous Flux	105 LM/W
Chip Brand	Osram
Input Voltage	220–240V AC
Driver Options	Lifud
Material	Die-cast aluminum
Finish	White / Black
Dimming	On/Off / Phase-cut / 0–10V / DALI-2


CCT OPTIONS

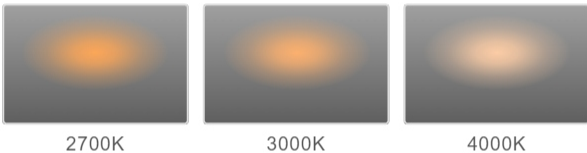

BEAM ANGLE OPTIONS

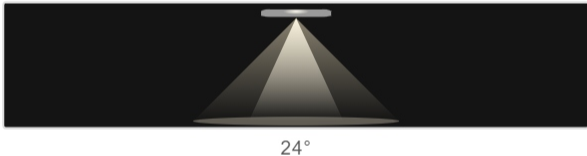

DIMMING OPTIONS

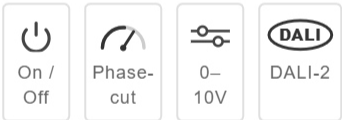


APPLICATIONS

- ⊙ Accent lighting
- 🏪 Retail
- 🖼️ Galleries
- 🍷 Hospitality

AVAILABLE VERSIONS

Code	Power	Luminous flux	Cut-out	Size
SP-RY-SLEEK-5W-BK-3K-24D	5W	525 lm	Ø35 mm	Ø60×H69 mm



Photometric reference: Photometric data measured at 3000K / CRI 80, Ta 25°C, nominal mains. Luminous flux tolerance ±10%. Lumen output and efficacy vary with correlated colour temperature (CCT) — warmer tones (2700–3000K) are typically lower and cooler tones (5000–6500K) higher — and reduce as CRI increases (90+ CRI is ~10–15% below 80 CRI). Full IES / LDT photometric files, LM-79 / LM-80 test reports and DIALux data are available on request.

Specifications are subject to change without prior notice