

CRI 90+ | 220–240V | IP44



A fixed directional LED spotlight for accent and feature lighting, delivering crisp, focused beams with exceptional colour accuracy, with a powder-coated finish.

KEY FEATURES


COB LED spotlight

The COB LED spotlight built around Osram LEDs, delivering 90+ colour rendering for accurate, true-to-tone light, with a 24 / 36 / 55 beam for focused, directional accenting, housed in a die-cast aluminum body with a powder-coated finish for effective heat management and a long service life. Dimmable via On/Off / Phase-cut / 0–10V / DALI, powered by a Lifud / Tridonic driver.

TECHNICAL SPECIFICATIONS

Light Source	COB LED
Power	3W / 5W / 7W / 10W
CCT	2700K / 3000K / 4000K / 6500K
CRI	90+
Beam Angle	24 / 36 / 55
Luminous Flux	95 lm/w
Chip Brand	Osram
Input Voltage	220–240V AC
Driver Options	Lifud / Tridonic
Material	Die-cast aluminum
Finish	White / Black / White + Black / Gun Black
Paint / Coating	Powder-coated
Beam Tilt	0°
Dimming	On/Off / Phase-cut / 0–10V / DALI


CCT OPTIONS

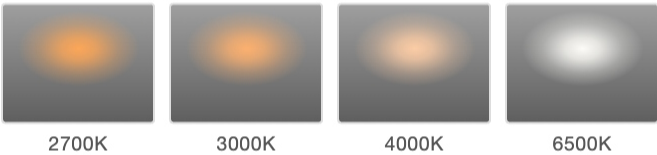

BEAM ANGLE OPTIONS



DIMMING OPTIONS



APPLICATIONS

- ⦿ Accent lighting
- 🏠 Retail
- 🖼️ Galleries
- 🍷 Hospitality

AVAILABLE VERSIONS

Code	Power	Luminous flux	Cut-out	Size
SPARK-3W	3W	285 lm	Ø25 mm	30 × 62 mm
SPARK-5W	5W	475 lm	Ø35 mm	37 × 65 mm
SPARK-7W	7W	665 lm	Ø55 mm	57 × 62 mm
SPARK-10W	10W	950 lm	Ø70 mm	75 × 80 mm

ACCESSORIES



Lens

