

IP44 | COB



A precision-engineered LED spotlight delivering reliable, high-quality illumination with exceptional colour accuracy.

KEY FEATURES


COB LED spotlight

The COB LED spotlight built around OSRAM LEDs, delivering 90+ colour rendering for accurate, true-to-tone light, with a 15° / 24° / 36° / 55° beam for focused, directional accenting, housed in a die-cast aluminum body with a powder-coated (matt) finish for effective heat management and a long service life. Rated IP44 for splash-prone areas such as bathrooms and kitchens, dimmable via On/Off / Phase-cut / 0–10V / DALI-2, powered by a Lifud / Tridonic driver.


TECHNICAL SPECIFICATIONS

Light Source	COB LED
Power	7W / 10W
CCT	2700K / 3000K / 4000K / 6500K
CRI	90+
Beam Angle	15° / 24° / 36° / 55°
Chip Brand	OSRAM
Input Voltage	220–240V AC
Driver Options	Lifud / Tridonic
Material	Die-cast aluminum
Finish	White / White-Black / Black / Gun Black
Paint / Coating	Powder-coated (matt)
IP Rating	IP44
Dimming	On/Off / Phase-cut / 0–10V / DALI-2
Warranty	5 years


CCT OPTIONS

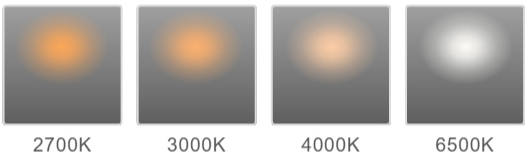

BEAM ANGLE OPTIONS

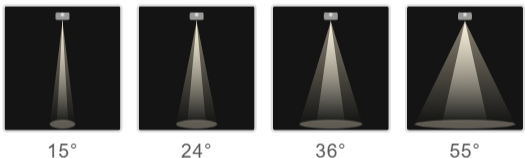

DIMMING OPTIONS



AVAILABLE VERSIONS

Code	Power	Luminous flux	Cut-out	Size
SP-RY-SPARK-7W	7W	950 lm	Ø55 mm	Ø60 × H55 mm
SP-RY-SPARK-10W	10W	950 lm	Ø75 mm	Ø82 × H71 mm


ACCESSORIES




Honeycomb
louvre



Lens



SP-RY-SPARK-7W



SP-RY-SPARK-10W