

GU10 5W GLASS

LED LAMP

Lamps

RAYTECK®

CRI 90+ | 220–240V | SMD | SELV



An energy-efficient retrofit LED lamp for standard GU10 and MR16 fittings, delivering a direct halogen replacement with warm, high-quality light with exceptional colour accuracy.

KEY FEATURES

GU10 lamp


The GU10 lamp delivers 90+ colour rendering for accurate, true-to-tone light, with a 15° beam for focused, directional accenting.



TECHNICAL SPECIFICATIONS

Lamp Base	GU10
Power	5W
CCT	2700K / 3000K / 4000K
CRI	90+
Beam Angle	15°
Luminous Flux	480 LM
Input Voltage	220–240VAC
Lamp Life	15,000 h
Energy Class	A ⁺
Dimming	On/Off
Operating Temperature	45° C
Warranty	3 years

CCT OPTIONS

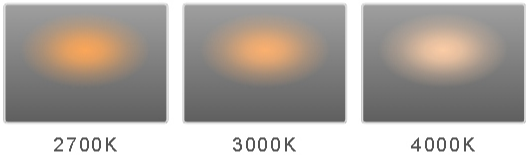

BEAM ANGLE OPTIONS



DIMMING OPTIONS




APPLICATIONS

- ⦿ Retrofit
- 🏠 Residential
- 🛒 Retail
- 👤 Hospitality

AVAILABLE VERSIONS

Code	Power	Luminous flux	Size
BLB-RY-GU10-5W-GL-15D	5W	480 LM	Ø50 × H56 mm



Photometric reference: Photometric data measured at 4000K / CRI 80, Ta 25°C, nominal mains. Luminous flux tolerance ±10%. Lumen output and efficacy vary with correlated colour temperature (CCT) — warmer tones (2700–3000K) are typically lower and cooler tones (5000–6500K) higher — and reduce as CRI increases (90+ CRI is ~10–15% below 80 CRI). Full IES / LDT photometric files, LM-79 / LM-80 test reports and DIALux data are available on request.

Specifications are subject to change without prior notice